

FORM PTO-1390  
(REV. 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

TJK/149

XXXXXXXXXXXXXXXXXXXX  
Japan patent application  
no. PL 09/720584

INTERNATIONAL APPLICATION NO.

PCT/JP00/02656

INTERNATIONAL FILING DATE

24 April 2000

PRIORITY DATE CLAIMED

23 April 1999

TITLE OF INVENTION

SHAPED SHEET AND METHOD FOR PRODUCING THE SAME

APPLICANT(S) FOR DO/EO/US

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☐ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).


## Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information: \$860.00 &
  - \* Check in the amount of \$40.00
  - \* Certificate of Express Mail No. EL304146145US
  - \* Return postcard
  - \* 4 sheets of drawings

\* PCT Request

\* Citations in Search Report

\* International Search Report

<b>09/7/2005 8/4</b> INTERNATIONAL APPLICATION NO Japan Appln. No. P11-115743 PCT/JP00/02656				ATTORNEY'S DOCKET NUMBER - TJK/149		
21. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. .... <b>\$1000.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b>  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS PTO USE ONLY</b>          <div style="display: flex; justify-content: space-between;"> <span>\$ 860.00</span> <span></span> </div>		
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				<div style="display: flex; justify-content: space-between;"> <span>\$</span> <span></span> </div>		
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$		
Total claims	3 - 20 =		x <b>\$18.00</b>	\$ 0		
Independent claims	2 - 3 =		x <b>\$80.00</b>	\$ 0		
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ <b>\$270.00</b>	\$		
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$ 860.00		
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$ +		
<b>SUBTOTAL =</b>				\$860.00		
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$		
<b>TOTAL NATIONAL FEE =</b>				\$ 860.00		
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +				\$ 40.00		
<b>TOTAL FEES ENCLOSED =</b>				\$ 900.00		
				Amount to be refunded:	\$	
				charged:	\$	
a. <input checked="" type="checkbox"/> (2) checks \$40.00 for recordal fee & A check in the amount of \$ <u>860.00</u> to cover the above fees is enclosed.  b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.  c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>23-2126</u> . A duplicate copy of this sheet is enclosed.  d. <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card</b> <b>information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.						
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.</b>						
SEND ALL CORRESPONDENCE TO  Timothy J. Keefer Wildman, Harrold, Allen & Dixon 225 West Wacker Drive Chicago, Illinois 60606 United States of America						
				SIGNATURE  Timothy J. Keefer NAME	<u>12/22/00</u>  35,567 REGISTRATION NUMBER	

TJK/149

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Takeshi Kubota ) SHAPED SHEET AND  
 ) METHOD FOR  
 ) PRODUCING THE SAME  
 PCT No: PCT/JP00/02656 )  
 )  
 PCT Filing Date: 24 April 2000 )

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
 Washington, D.C. 20231

Sir:

Please amend the subject application as follows:

IN THE SPECIFICATION:

Please insert the following paragraph at the beginning of the application before  
 the "BACKGROUND ART":

**-- CROSS REFERENCE TO RELATED APPLICATION**


This application claims the priority of Japanese patent application Serial No. P11-  
 115743 filed on April 23, 1999. -


**REMARKS**

Please amend the above identified application by inserting priority information as  
 set forth above.

Respectfully submitted,

Date: 12/22/2000  
 WILDMAN, HARROLD, ALLEN & DIXON  
 225 West Wacker Drive  
 Chicago, IL 60606  
 Ph. 312/201-2000  
 Fax 312/201-2555

By:   
 Timothy J. Keefer, Reg. No. 35,567

CERTIFICATE OF EXPRESS MAIL  
 Mailing label number: EL3041461455  
 Date: 12/22/00  
 That this document is being deposited with the  
 United States Postal Service Express Mail Post Office to  
 the address indicated above and is addressed to the  
 Assistant Commissioner for Patents, Washington, D.C. 20231.  


2/10/77

09/720584  
526 Rec'd PCT/PTO 22 DEC 2000

SHAPED SHEET AND METHOD FOR PRODUCING THE SAME

**[Technical Field]**

The present invention relates to a shaped sheet used to produce a resin coating of a synthetic resin by a casting method, and, particularly, to a composite shaped sheet used in a step of providing an artificial leather with an irregular shape when the artificial leather is manufactured.

**[Background Art]**

In a conventional method of the production of an artificial leather, a releasing sheet or a shaped sheet is used to form a resin coating from a synthetic resin solution by a casting method and thereafter the resin coating is laminated on a ground fabric. In the casting method, a solution or molten composition comprising a natural or synthetic resin having qualities similar to an artificial leather is used to form a uniform resin coating on a releasable resin layer of a shaped sheet by application. Next, the resin coating is laminated on the ground fabric by, as desired, preparing an adhesive layer. After that, the adhesive layer is dried or cured to the extent that no hindrance to successive processing is placed and then the shaped sheet is peeled off and removed. Further, a pattern layer is directly printed on the surface of the aforementioned resin coating or formed by transfer printing to provide a leather pattern or an abstract pattern and

surface treatment is performed using a non-colored transparent or transparent colored paint with the intention of preventing the falling of printing ink and to regulate the surface glossiness thereby manufacturing a product.

In the aforementioned surface decorative method, a colorful surface is obtained but the surface exhibits a flat feeling and a leather like appearance which is three-dimensional and which has a high design value cannot be obtained. In such a case, a shaped sheet formed with an irregular shape by embossing a releasable resin layer of the releasing sheet is used to form thick and thin parts of the resin coating thereby providing a three-dimensional feeling and expressing color shading by varied thickness parts of the colored resin coating.

However, in the production of a releasing sheet formed with a transfer pattern, namely a shaped sheet, a negative pattern is formed on a releasable resin layer which is made up of a thermoplastic resin and formed on a substrate sheet by embossing processing using an embossing roll corresponding to a positive plate having the irregularity of a leather to form the shaped sheet.

As to this irregular shape, a releasable resin layer which is made of a thermoplastic resin and formed on a substrate sheet is put in a molten state by heating to form a desired irregular shape by the aforementioned embossing roll. In order to reproduce the pattern of the embossing roll fairly in the production of the aforementioned

irregular pattern, it is necessary to melt the releasable resin layer by sufficient heating and to perform the transfer of the pattern (a positive pattern in general) of the embossing roll and cooling exactly. Therefore, this conventional method needs the time required for uniform heating, the pressure required to insert the embossing roll for embossing and the time required for cooling, resulting in remarkably low productivity and it is difficult to reproduce the pattern of the embossing roll fairly and stably.

#### **[Summary of the Invention]**

In order to solve the above problem, it is an object of the present invention to provide a shaped sheet in which a predetermined pattern is fairly reproduced in the embossing processing of the shaped sheet and also to provide a production method superior in productivity.

The above object can be attained by a shaped sheet according to the present invention, the shaped sheet being provided with a releasable resin layer having a transfer pattern formed of an irregular shape on one side of a substrate sheet to form a resin coating having an irregular shape by casting from a solution of a reactive or thermoplastic resin or a thermally molten composition, wherein a flat portion of the transfer pattern is formed of an irregular surface having an arithmetic average roughness Ra of 30.0 to 1.5  $\mu\text{m}$ .

In the invention, the shaped sheet may be provided with a fine irregular surface having a maximum height  $R_y$  of 100.0 to 10.0  $\mu\text{m}$  by the transfer pattern.

Also, the above object can be attained by a method of producing a shaped sheet according to the present invention, the shaped sheet being provided with a releasable resin layer having a transfer pattern formed of an irregular shape on one side of a substrate sheet to form a resin coating having an irregular shape by casting from a reactive or thermoplastic resin solution or thermally molten composition, the method comprising forming a releasing sheet in which the releasable resin layer of the substrate sheet has a fine irregular surface with an arithmetic average roughness  $R_a$  of 2.0 to 0.3  $\mu\text{m}$  and then performing embossing processing so as to form an irregular shape on the releasable resin layer such that a flat portion of the formed transfer pattern is formed of a fine irregular surface having an arithmetic average roughness  $R_a$  of 30.0 to 1.5  $\mu\text{m}$ .

The present invention, as mentioned above in detail, comprises forming a fine irregular surface on a releasable resin of the releasing sheet and performing embossing processing to transfer the irregular pattern of the embossing roll. For this reason, the convex portion of the embossing roll is inserted deeply into the releasable resin and thus the present invention produces the effect of forming a shaped sheet having a fine irregular surface in which the state of the concave portion of the embossing roll is fairly

reproduced in the fine irregular surface.

**[Brief description of the Drawings]**

FIG. 1 is a conceptional view showing a section of a shaped sheet according to the present invention.

FIG. 2(A) is a sectional view of a releasing sheet showing the state of a shaped sheet according to the present invention prior to embossing processing, FIG. 2(B) is a conceptional view of a section showing the situation where a shaped sheet according to the present invention is subjected embossing processing, and FIG. 2(C) is a conceptional view showing a section of a completed shaped sheet according to the present invention.

FIG. 3(A) is a schematically sectional view of a releasing sheet for producing a shaped sheet according to a conventional method, FIG. 3(B) is a conceptional view of a section showing the situation where a shaped sheet is subjected embossing processing according to the conventional method, and FIG. 3(C) is a conceptional view showing the section of a completed shaped sheet according to the conventional method.

FIG. 4(A) is an imaginary view showing the condition of an embossing using an embossing roll in the present invention, and FIG. 4(B) is an imaginary view showing the condition of an embossing using an embossing roll in a conventional method.



### [Preferred Embodiments of the Invention]

A shaped sheet according to the present invention is, as shown in FIG. 1, a shaped sheet 10 which is provided with a releasable resin layer having an transfer pattern 3 formed of an irregular shape on one side of a substrate sheet 1 and forms a resin coating having an irregular shape by casting from a solution of a reactive or thermoplastic resin or a thermally molten composition, wherein a flat portion of the transfer pattern 3 is formed of a fine irregular surface 31 having an arithmetic average roughness Ra of 30.0 to 1.5  $\mu$ m.

In the present invention, the shaped sheet 10 may be provided with a fine irregular surface having a maximum height Ry of 100.0 to 10.0  $\mu$ m by the transfer pattern.

Also, as shown in FIG. 2(C), the present invention directs to a method of producing the shaped sheet 10 which is provided with a releasable resin layer 2 having the transfer pattern 3 formed of an irregular shape on one side of the substrate sheet 1 to form a resin coating having an irregular shape by casting from a reactive or thermoplastic resin solution or thermally molten composition, the method comprising forming a releasing sheet 11 in which the releasable resin layer 2 of the substrate sheet 1 has a fine irregular surface 30 with an arithmetic average roughness Ra of 2.0 to 0.3  $\mu$ m as shown in 2(A).

Then performing embossing processing is performed, so as to form an irregular shape on the releasable resin layer

2 as shown in FIG. 2(B) such that a flat portion of the transfer pattern is formed of a fine irregular surface 31 having an arithmetic average roughness Ra of 30.0 to 1.5  $\mu$ m as shown in FIG. 2(C).

The substrate sheet used for the shaped sheet of the present invention may be selected from sheet-like materials which are reduced in thickness variation and which are free from melt-cutting and deformation such as elongation or contraction caused by heat or solvents in a step of forming the releasable resin layer, the embossing processing and the step of forming a composition of an artificial leather by application.

Examples of the substrate sheet include paper such as unbleached kraft paper, unglazed kraft paper, machine grazed kraft paper, simili paper and wood free paper and nonwoven fabric constituted of a polyester, rayon or the like.

As to the thickness of the substrate sheet, those having a basis weight of 30 to 300 g/m<sup>2</sup> are preferable.

When a solution having releasability or a dispersion type material is applied to form the releasable resin layer, it is desirable to provide a filling layer on the surface of paper for the purpose of preventing the penetration of a coating solution. For the filling layer, a resin latex containing a filler such as calcium carbonate, barium sulfate, silica or clay is applied in an amount of 5 to 30 g/m<sup>2</sup> (solid content) and the surface of the layer may be made smooth by calendering according to the need. Also, a

thermoplastic resin such as a polyolefin may be applied by melting extrusion coating to form the filling layer.

The releasable resin layer of the present invention is selected from materials which have releasability even after materials of an artificial leather is applied and formed as a film and which enable a transfer pattern to be maintained even if heat is applied during processing.

Examples of these materials include thermoplastic resins such as a polypropylene, high density polyethylene, silicone resin and polymethylpentene and also include materials, which are non-adhesive at ambient temperature and are cured by applying energy thereto after embossing processing, such as resins which are cured by ionizing radiation rays such as ultraviolet rays or electron rays and thermosetting resins such as alkyd resins in which a solid resin is blended.

When the releasable resin layer is formed using a thermoplastic resin, it is formed by heating and melting extrusion coating in the case where the resin consists of 100% of a solid and by the usual coating system such as gravure coating, roll coating, bar coating and air knife coating in the case where the resin is in the state of a solution or dispersion. Also, the releasable resin layer is structured by laminating a film, which is produced in a separate step and made of a releasable resin, either through the provision of an adhesive layer or by sandwich lamination through a heat meltable resin.

The fine irregular surface to be formed on the releasable resin layer used in the present invention may be embossed by a cooling roll when a thermoplastic resin which is a releasable resin layer is applied to the substrate sheet by melting extrusion coating or is formed by a T-dice method. Then, the arithmetic average roughness Ra of the fine irregular surface 30 shown in FIG. 2(A) is set to a range from 2.0 to 0.3  $\mu\text{m}$ . When the roughness is larger than 2.0  $\mu\text{m}$ , the fine irregular surface 30 is pressed insufficiently when the transfer pattern 3 is formed by the embossing roll 5 and the fine irregular surface 31 formed on the surface of the shaped sheet 10 is thereby increased in roughness as shown in FIG. 2(B). Therefore, the glossiness of a synthetic resin leather to be formed by casting is excessively degraded resultantly.

On the other hand, when the roughness is smaller than 0.3  $\mu\text{m}$ , the fine irregular surface is close to a smooth surface 32 shown in FIG. 3(A). Further, even if stronger pressure is applied such that a convex portion 51 of the embossing roll reaches the releasable resin layer 2 completely as shown in FIG. 4(B) when the transfer pattern 3 is pressed by the embossing roll 5, a non-embossed portion 53 where the embossing roll is not in contact with the releasable resin is produced because of the intervention of gas between the convex portion 51 of the embossing roll and the releasable resin layer 2. As a result, in the transfer pattern 3 of the shaped sheet 10, a given depth cannot be

attained. Therefore, the depth of a concave portion of an artificial leather to be formed by casting using such a shaped sheet is insufficient and uneven.

When the releasing sheet having an arithmetic average roughness  $R_a$  of 2.0 to 0.3  $\mu\text{m}$  is subjected to embossing processing, the bite of the embossing roll at the releasing sheet does not always depends on the height of the embossing. Specifically, those having higher transfer pattern, that is, a larger pattern tend to have higher adaptability to embossment. A high embossing effect is produced particularly in the case of a shaped sheet formed with fine irregular surface having a maximum height  $R_y$  of 100.0 to 10.0  $\mu\text{m}$  according to the height of the embossing, namely the transfer pattern. When the maximum height of the transfer pattern is 10.0  $\mu\text{m}$  or less, a difference in each of embossing height, unevenness and glossiness is small even if a releasing sheet having an arithmetic average roughness  $R_a$  of 0.3  $\mu\text{m}$  or less is used. When the maximum height of the embossing pattern is 100.0  $\mu\text{m}$  or more, the embossing roll strongly bites at the releasable resin layer, requiring large force to peel off the releasable layer from the embossing roll. Specifically, if embossing speed is not lowered, no operation is continued, resulting in reduced productivity.

As shown in FIG. 2(A), the transfer pattern 3 of the shaped sheet 10 of the present invention is formed on the surface of the releasable resin layer 2 of the releasing sheet

11 obtained by laminating the releasable resin layer 2 provided with the fine irregular surface 30 having an arithmetic average surface roughness Ra of 2.0 to 0.3  $\mu\text{m}$  on the substrate sheet 1. Specifically, a paper roll as a backup roll, though not shown, is disposed on the side of the substrate sheet 1 of the releasing sheet 11 such that the embossing roll 5 provided with the transfer pattern 3 is brought into contact with the releasable resin layer 2. Then, the side of the releasable resin layer 2 is heated to the melting point thereof by using heating steam, a heating medium or an infrared heater and cooling and molding operations are performed to carry out embossing processing while pressure is applied by a cooled embossing roll as shown in FIG. 2(B) to form the shaped sheet 10 provided with the transfer pattern 3. At this time, the fine irregular surface 30 to be embossed is pressed by the embossing roll 5 and its flat portion is changed to the fine irregular surface 31 which is almost flat. Such a non-embossed portion as shown in FIG. 4(A) is not formed between the convex portion 51 of the embossing roll and the releasable resin layer. The transfer pattern 3 having a depth similar to that of a given one can be structured.

On the surface of the transfer pattern 3 of the shaped sheet formed according to the present invention, a heat resistant "resin varnish of a releasable composition" (not shown), may be formed by application. In this case, the resin layer forming the transfer pattern surface must

unnecessarily have the releasability from a composition constituting an artificial leather.

A material used for the resin layer may be rather selected, placing great importance on transferability and heat resistance. For instance, resins which have non-adhesive plasticity at room temperature and which are cured by ionizing radiation such as ultraviolet rays or electron rays, curable resins of epoxy resins or saturated polyesters/polyisocyanate type resins or thermoplastic resins such as saturated polyesters, polyethylene or polyimides may be used by applying each of these resins or by laminating a film of each resin.

The aforementioned resin varnish of a releasable composition is preferably formed by application as a thin film layer with a thickness of the order of 0.2 to 2  $\mu$ m. Examples of materials used for the composition include silicone, fluororesins, thermosetting resins such as an aminoalkyd and ionizing radiation-curable resins prepared properly from a prepolymer, oligomer and/or monomer having a polymerizable unsaturated bond or an epoxy group in a molecule.

As to the application of the releasable composition, the composition which is diluted by solvent as required such that it has a viscosity as low as possible is uniformly applied so as to extend to the concave portion of the shaped sheet by a coating method such as gravure or roll coating (direct or reverse), air knife coating, curtain coating or

bar coating. Heat or ionizing radiation is applied in accordance with the qualities of the coating solution to cure the solution thereby modifying the releasability of the irregular surface and heat resistance.

Also, it is desirable to perform corona discharge treatment on the coating surface provided with an irregular pattern thereby allowing the coating surface to adhere to the releasable resin varnish firmly and stably.

Ra (arithmetic average roughness) and Ry (maximum height) used in the present invention were measured by the following measuring method and measuring condition.

(Measuring method)

Measurements were made based on Japanese Industrial Standards (JIS B 0601-1994) [Surface roughness-Definition and Indication]. International Standards corresponding to this Japanese Standards are shown below.

- ISO 468-1982 (Surface roughness - Parameters, their values and general rules for specifying requirements)
- ISO 3274-1975 (Instruments for the measurement of surface roughness by the profile method - Contact (stylus) instruments of consecutive profile transformation - Contact profile meters, system M)
- ISO 4287/1-1984 (Surface roughness - Terminology Part 1: Surface and its parameters)
- ISO 4287/2-1984 (Surface roughness - Terminology Part 2: Measurement of surface roughness parameters)
- ISO 4288-1985 (Rules and procedures for the measurement



of surface roughness using stylus instruments)

(Measuring condition)

Radius of the tip of a tracer: 5  $\mu\text{m}$

Load: 4 mN

Cutoff value: Standard values described in Table 1 were selected.

Standard length: Standard values described in Table 2 were selected.

Measuring instruments: surface roughness measuring device Sufitest-201 manufactured by Mitsutoyo

[Table 1]

Range of Ra ( $\mu\text{m}$ )		Cutoff value $\lambda_c$ (mm)	Evaluated length $l_n$ (mm)
Exceeding	Less than		
(0.006)	0.02	0.08	0.4
0.02	0.1	0.25	1.25
0.1	2.0	0.8	4
2.0	10.0	2.5	12.5
10.0	80.0	8	40

Numerals in ( ) are reference values

[Table 2]

Range of Ry ( $\mu\text{m}$ )		Standard length $l$ (mm)	Evaluated length $l_n$ (mm)
Exceeding	Less than		
(0.025)	0.10	0.08	0.4
0.10	0.50	0.25	1.25
0.50	10.0	0.8	4
10.0	50.0	2.5	12.5
50.0	200.0	8	40

Numerals in ( ) are reference values

## [EXAMPLES]

The present invention will be hereinafter explained in more detail by way of examples.

### (Example)

A polypropylene (releasable resin 2) was applied on one surface of a simili paper (substrate sheet 1) weighing  $52 \text{ g/m}^2$  in a thickness of  $30 \text{ }\mu\text{m}$  by using a T-die melting extrusion coater provided with a cooling roll having an irregular pattern with an arithmetic average roughness  $R_a$  of  $1 \text{ }\mu\text{m}$  to produce a releasing sheet 11 having a fine irregular surface 30 shown in FIG. 2(A). The fine irregular surface at this time had an arithmetic average roughness of  $0.7 \text{ }\mu\text{m}$ , a cutoff value of  $0.8 \text{ mm}$  and an evaluated length of  $4 \text{ mm}$ .

Next, a paper roll and an embossing roll with a convex portion 51 having a height of  $h$  were placed on an embossing processing machine. The above releasing sheet 11 was preheated to  $120^\circ\text{C}$  and the embossing roll 5 cooled to  $10^\circ\text{C}$  was used to transfer the pattern under cooling at a pressure of  $60 \text{ kg/cm}^2$  as shown in FIG. 2(B) thereby producing a shaped sheet 10 having a transfer pattern 3. The fine irregular surface 31 of the shaped sheet 10 as shown in FIG. 2(C) was formed in a manner that it was brought into contact with the convex portion of a master roll in the condition shown in FIG. 4(A). The surface condition of the aforementioned fine irregular surface 31 was as follows: arithmetic average

roughness:  $0.1\ \mu\text{m}$ , cutoff value:  $0.25\ \text{mm}$  and evaluated length:  $1.25\ \text{mm}$ . The depth in the surface condition of the transfer pattern 3 almost corresponded to the convex portion 51 having a height of  $50\ \mu\text{m}$  which was formed on the embossing roll 5. Also, the maximum height was  $45\ \mu\text{m}$ , the standard length was  $0.25\ \text{mm}$  and the evaluated length was  $1.25\ \text{mm}$ .

(Comparative Example 1)

A polypropylene (releasable resin 2) was applied on one surface of a simili paper (substrate sheet 1) weighing  $52\ \text{g/m}^2$  in a thickness of  $30\ \mu\text{m}$  by using a T-die melting extrusion coater provided with a cooling roll having an irregular pattern with an arithmetic average roughness  $R_a$  of  $0.3\ \mu\text{m}$  to produce a releasing sheet 11 having a smooth surface 32 shown in FIG. 3(A). The fine irregular surface corresponding to the smooth surface at this time had an arithmetic average roughness of  $0.2\ \mu\text{m}$ , a cutoff value of  $0.8\ \text{mm}$  and an evaluated length of  $4\ \text{mm}$ .

Next, the above releasing sheet 11 was placed on an embossing machine provided with a paper roll and a master plate 5 and was preheated to  $120^\circ\text{C}$ . An embossing roll cooled to  $10^\circ\text{C}$  was used to transfer the pattern under cooling at the same pressure as in Example 1 as shown in FIG. 2(B) thereby forming a transfer pattern 3 shown in 2(C).

However, the convex portion 51 of the embossing roll could be inserted insufficiently as shown in FIG. 3(B) or FIG. 4(B), so that a non-embossed portion 53 was produced.

For this reason, a pressure 1.7 times that of Example 1 was applied so that the concave portion 52 of the embossing roll was perfectly brought into contact with the releasing sheet 11 to form a shaped sheet 10 as a comparative example.

The surface condition of the aforementioned transfer irregular surface 33 of the shaped sheet 10 was as follows: arithmetic average roughness:  $0.1 \mu\text{m}$ , cutoff value:  $0.25 \text{ mm}$  and evaluated length:  $1.25 \text{ mm}$ . This surface condition was not almost different from that of the smooth surface 32 of the releasing sheet.

The depth in the surface condition of the transfer pattern 3 corresponded to 0.6 times the height, namely  $50 \mu\text{m}$ , of the convex portion 51 formed on the embossing roll 5. Also, the maximum height was  $30 \mu\text{m}$ , the standard length was  $0.25 \text{ mm}$  and the evaluated length was  $12.5 \text{ mm}$  showing that the embossing pattern was insufficiently transferred.

#### (Comparative Example 2)

A polypropylene (releasable resin 2) having a thickness of  $30 \mu\text{m}$  was applied on one surface of a simili paper (substrate sheet 1) weighing  $52 \text{ g/m}^2$  by using a T-die melting extrusion coater, though not shown, provided with a cooling roll having an irregular pattern with an arithmetic average roughness  $R_a$  of  $3 \mu\text{m}$  to produce a releasing sheet 11. The fine irregular surface at this time had an arithmetic average roughness of  $2.2 \mu\text{m}$ , a cutoff value of  $2.5 \text{ mm}$  and an evaluated length of  $12.4 \text{ mm}$ .

Next, the above releasing sheet 11 was subjected to embossing processing conducted in the same manner as in Example 1 to form a transfer pattern.

The surface condition of the aforementioned transfer irregular surface 33 of the shaped sheet 10 was as follows: arithmetic average roughness:  $0.1 \mu\text{m}$ , cutoff value:  $0.25 \text{ mm}$  and evaluated length:  $1.25 \text{ mm}$ . This surface condition was not almost different from that of the fine irregular surface of the releasing sheet. However, the maximum roughness was larger than that of Example 1 and the surface exhibited an uneven condition. Also, the depth in the surface condition of the transfer pattern 3 almost corresponded to the convex portion 51 having a height of  $50 \mu\text{m}$  which was formed on the embossing roll 5. Also, the maximum height was  $45 \mu\text{m}$ , the standard length was  $0.25 \text{ mm}$  and the evaluated length was  $1.25 \text{ mm}$ .

Using these shaped sheets prepared in Examples and Comparative Examples, a colored polyurethane paint was applied to each of these sheets in an amount of  $80 \text{ g/m}^2$  (solid content) by using a knife coater with a clearance set to  $250 \mu\text{m}$ . After the paint was dried, the sheet was laminated on a white fabric to obtain an artificial leather having an irregular pattern. The results of evaluation of the surface condition of the formed artificial leather by visual observation are as shown in Table 3.

[Table 3]

Sample	Example 1	Comparative Example 1	Comparative Example 2
Depth of irregularity	Good	Shallow	Good
Unevenness of the surface	Good	Exist slightly	Generation of unevenness
Glossiness of the surface	Good	Good	Deficient glossiness

## CLAIMS

1. A shaped sheet provided with a releasable resin layer having a transfer pattern formed of an irregular shape on one side of a substrate sheet to form a resin coating having an irregular shape by casting from a solution of a reactive or thermoplastic resin or a thermally molten composition, wherein a flat portion of the transfer pattern is formed of an fine irregular surface having an arithmetic average roughness Ra of 30.0 to 1.5  $\mu\text{m}$ .
2. A shaped sheet according to Claim 1, wherein the shaped sheet is provided with a fine irregular surface having a maximum height Ry of 100.0 to 10.0  $\mu\text{m}$  by the transfer pattern.
3. A method of producing a shaped sheet provided with a releasable resin layer having a transfer pattern formed of an irregular shape on one side of a substrate sheet to form a resin coating having an irregular shape by casting from a reactive or thermoplastic resin solution or thermally molten composition, the method comprising forming a releasing sheet in which the releasable resin layer of the substrate sheet has a fine irregular surface with an arithmetic average roughness Ra of 2.0 to 0.3  $\mu\text{m}$  and then performing embossing processing so as to form an irregular shape on the releasable resin layer such that a flat portion of the transfer pattern is formed of a fine irregular surface

having an arithmetic average roughness Ra of 30.0 to 1.5  $\mu$   
m.



## ABSTRACT

An object of the present invention is to fairly reproduce the irregular surface of a shaped sheet for a cast resin film and a production method having high productivity. In order to attain the above object, the present invention provides a shaped sheet provided with a releasable resin layer having a transfer pattern formed of an irregular shape on one side of a substrate sheet 1, wherein a flat portion of the transfer pattern is formed of an fine irregular surface having an arithmetic average roughness Ra of 30.0 to 1.5  $\mu$  m.

FIG. 1

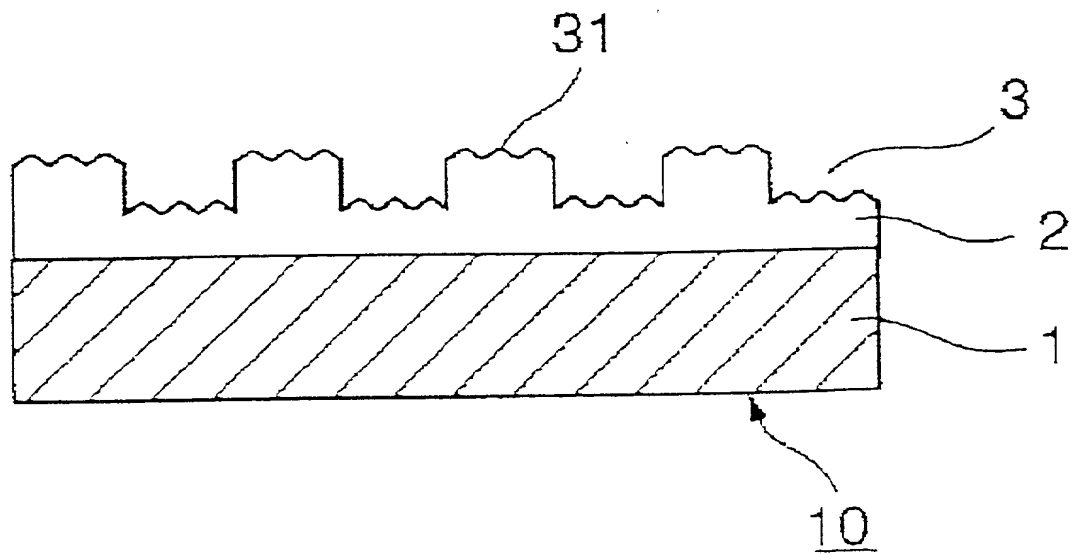


FIG. 2A

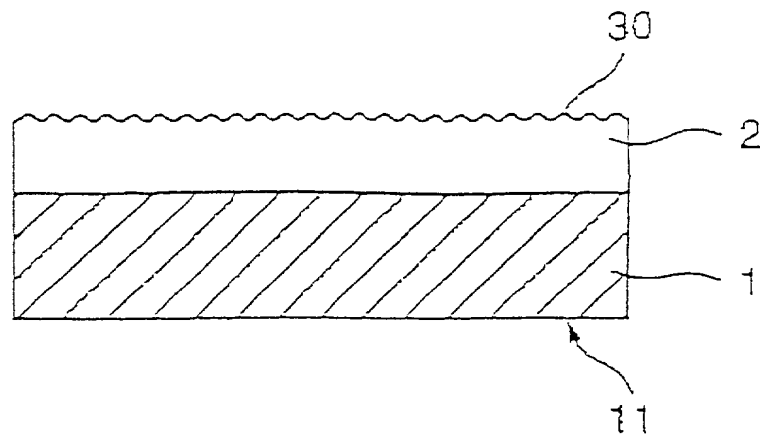


FIG. 2B

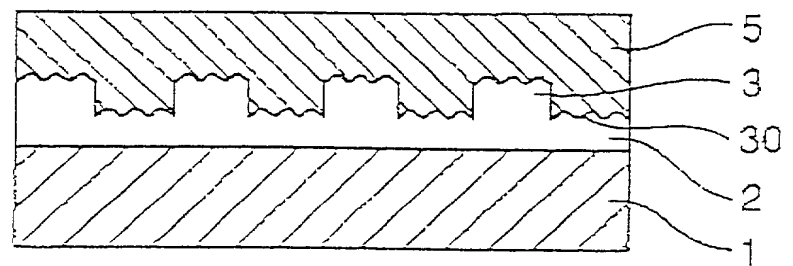


FIG. 2C

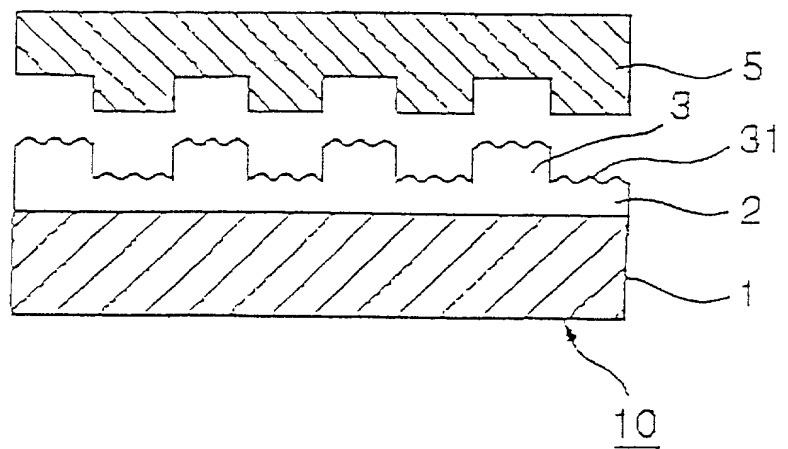


FIG. 3A

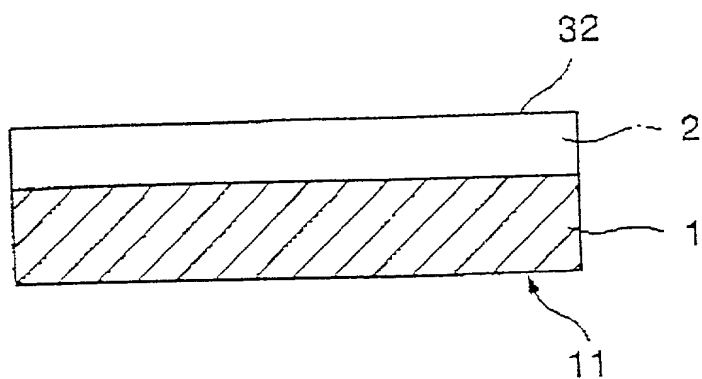


FIG. 3B

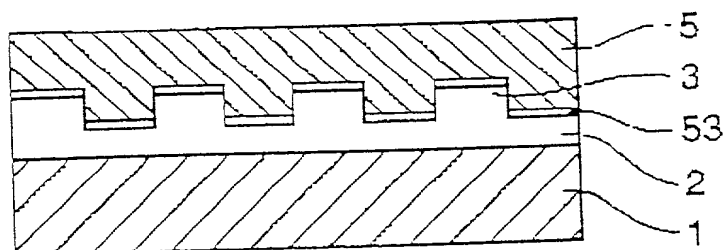


FIG. 3C

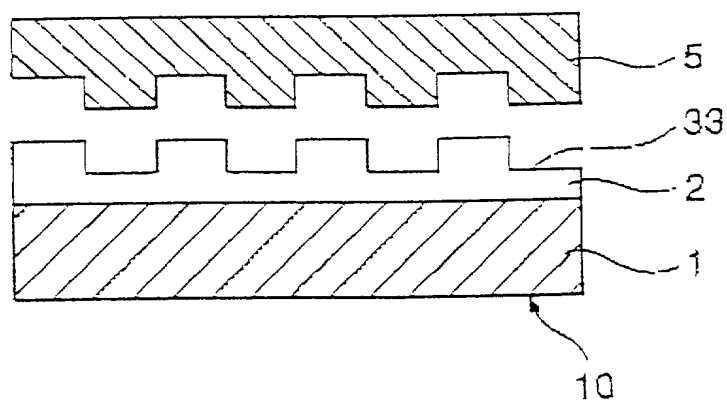


FIG. 4A


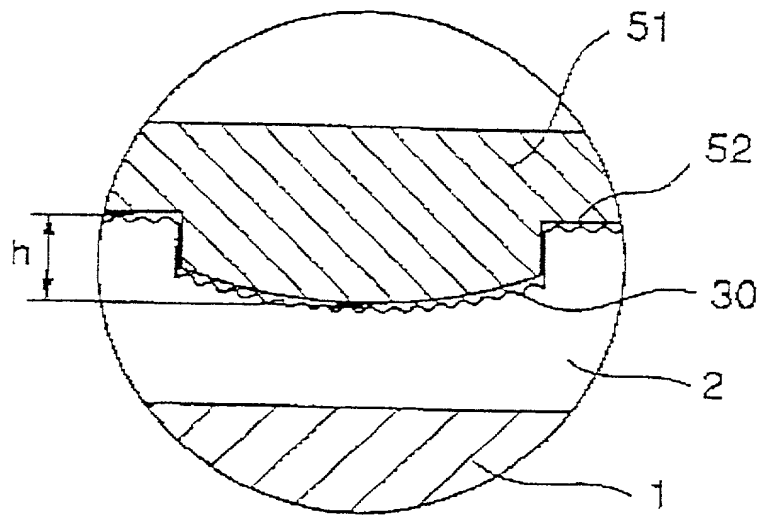


FIG. 4B

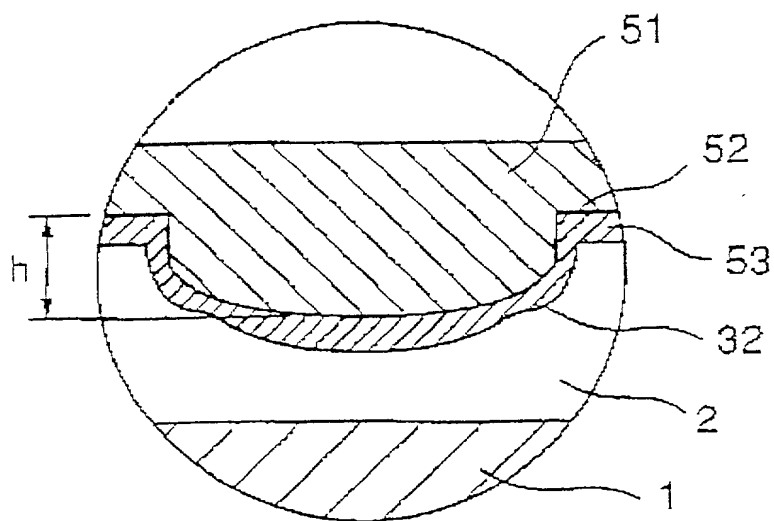

# Declaration and Power of Attorney for Patent Application

## 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

私は、以下に記名された発明者として、ここに下記の通り宣言する：

As a below named inventor, I hereby declare that

私の住所、郵便の宛先そして国籍は、私の氏名の後に記載された通りである。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明について、特許請求範囲に記載され、且つ特許が求められている発明主題に関して、私は、最初、最先且つ唯一の発明者である（唯一の氏名が記載されている場合）か、或いは最初、最先且つ共同発明者である（複数の氏名が記載されている場合）と信じている。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SHAPED SHEET AND METHOD FOR  
PRODUCING THE SAME

上記発明の明細書はここに添付されているが、下記の額がチェックされている場合は、この限りでない：

the specification of which is attached hereto unless the following box is checked.

☐ \_\_\_\_\_ の日に出願され、  
この出願の米国出願番号またはPCT国際出願番号は、  
\_\_\_\_\_ であり、且つ  
\_\_\_\_\_ の日に補正された出願（該当する場合）

☒ was filed on April 24, 2000  
as United States Application Number or  
PCT International Application Number  
PCT/JP00/02656 and was amended on  
\_\_\_\_\_ (if applicable)

私は、上記の補正書によって補正された、特許請求範囲を含む上記明細書を検討し、且つ内容を理解していることをここに表明する。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編規則1.56に定義されている、特許性について重要な情報を開示する義務があることを認める。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the need of the individual case. Any comments on the amount of time you are required to complete this form should be sent to Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231

# Japanese Language Declaration (日本語宣言書)

私は、ここに、以下に記載した外国での特許出願または発明者証の出願、或いは米国以外の少なくとも一国を指定している米国法典第35編第365条(a)によるPCT国際出願について、同第119条(a)-(d)項又は第365条(b)項に基づいて優先権を主張するとともに、優先権を主張する本出願の出願日より前の出願日を有する外国での特許出願または発明者証の出願、或いはPCT国際出願については、いかなる出願も、下記の枠内をチェックすることにより示した。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application for which priority is claimed.

Prior Foreign Application(s)  
外国での先行出願

Priority Not Claimed  
優先権主張なし

P11-115743  
(Number)  
(番号)

Japan  
(Country)  
(国名)

23/04/1999  
(Day/Month/Year Filed)  
(出願日/月/年)

☐

(Number)  
(番号)

(Country)  
(国名)

(Day/Month/Year Filed)  
(出願日/月/年)

☐

私は、ここに、下記のいかなる米国仮特許出願についても、その米国法典第35編119条(e)項の利益を主張する。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、ここに、下記のいかなる米国出願についても、その米国法典第35編第120条に基づく利益を主張し、又米国を指定するいかなるPCT国際出願についても、その同第365条(c)に基づく利益を主張する。また、本出願の各特許請求の範囲の主題が、米国法典第35編第112条第1段に規定された態様で、先行する米国出願又はPCT国際出願に開示されていない場合においては、その先行出願の出願日と本国内出願日またはPCT国際出願日との間の期間中に入手された情報で、連邦規則法典第37編規則1.56に定義された特許性に関わる重要な情報について開示義務があることを承認する。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可、係属中、放棄)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可、係属中、放棄)

私は、ここに表明された私自身の知識に係わる陳述が真実であり、且つ情報と信ずることに基づく陳述が、真実であると信じられることを宣言し、さらに、故意に虚偽の陳述などを行った場合は、米国法典第18編第1001条に基づき、罰金または拘禁、若しくはその両方により処罰され、またそのような故意による虚偽の陳述は、本出願またはそれに対して発行されるいかなる特許も、その有効性に問題が生ずることを理解した上で陳述が行われたことを、ここに宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**Japanese Language Declaration**  
(日本語宣言書)

委任状： 私は本出願を審査する手続を行い、且つ米国特許商標庁との全ての業務を遂行するために、記名された発明者として、下記の弁護士及び／または弁理士を任命する。(氏名及び登録番号を記載すること)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

書類送付先 Timothy J. Keefer, 35,567;  
Douglas S. Rupert, 44,434;  
Carmen B. Patti, 26,784;  
Thomas J. Ring 29,971;  
Gary R. Gillen, 35,157;  
Robert J. Brill, 36,760;  
Gregory B. Gulliver, 44,138

Send Correspondence to Timothy J. Keefer  
c/o Wildman, Harrold  
Allen & Dixon  
225 W. Wacker Drive  
Chicago, Illinois  
60606

直通電話連絡先： (氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Timothy J. Keefer  
(312) 201-2327

唯一または第一発明者氏名		Full name of sole or first inventor	
100		Takeshi KUBOTA	
発明者の署名	日付	Inventor's signature	Date
		Takeshi Kubota	December 1, 2000
住所		Residence	
		Shinjuku-ku, Tokyo-to, 162-8001	Japan
国籍		Citizenship	
		Japanese	
郵便の宛先		Post Office Address	
		c/o Dai Nippon Printing Co., Ltd.,	
		1-1, Ichigaya-kagacho 1-chome,	
		Shinjuku-ku, Tokyo-to, 162-8001	
		Japan	
第二共同発明者がある場合、その氏名		Full name of second joint inventor, if any	
第二共同発明者の署名	日付	Second inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post Office Address	

(第三以下の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)